

**TVT**

*Secure The World With You*


**HD** CCTV  
Over Coax



**1080P** DISPLAY

**5MP** Lite RECORD

**5MP** Lite PLAYBACK

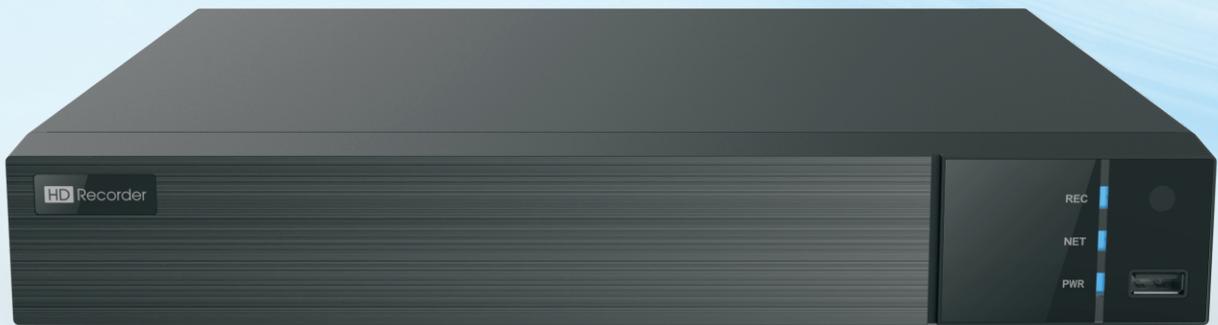

**TD-2700TS-HC**

**TVT**

TVT DIGITAL TECHNOLOGY CO., LTD.


Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay  
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong  
Province, P.R.China  
Tel: +86-755-36995888  
Fax: +86-755-33104777  
Web site: <http://en.tvt.net.cn>  
E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)



## Introduction

TD-2700TS-HC series are 4 / 8 CH 5MP Lite high definition DVRs with ability to connect analog and IP cameras simultaneously, which adopt the standard H.265 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. TD-2700TS-HC support 4 / 8 CH video input, 4 / 8 CH audio input, simultaneous 4 / 8 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

## Dimensions

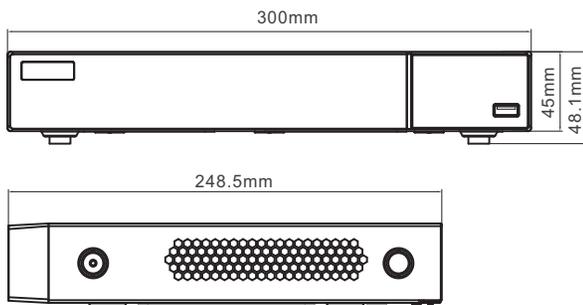


## Characteristics


- 4 / 8 CH TVI / AHD / CVI 5MP / 4MP / 1080P / 720P / WD1 video input
- 4 / 8 CH DVRs default support 2 / 4 CH 5MP / 4MP / 3MP / 1080P / 960P / 720P IP video input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse
- Multi-mode recording: manual / timer / motion  
Playback : 4 / 8 CH simultaneously playback
- Search: time slice, time, event ( manual, motion ), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

## Rear Panels

### TD-2704TS-HC

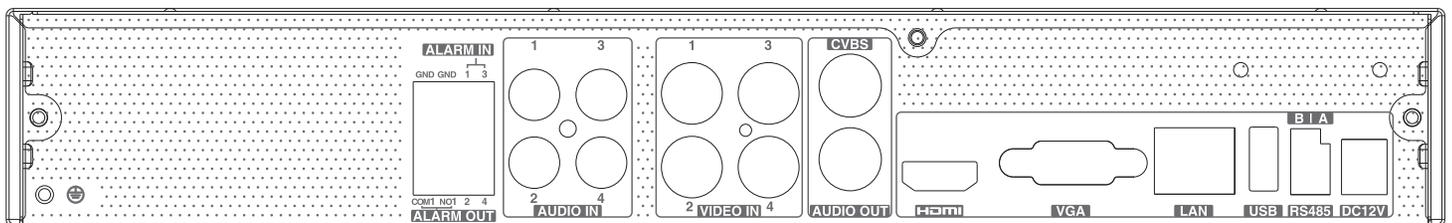

### TD-2708TS-HC

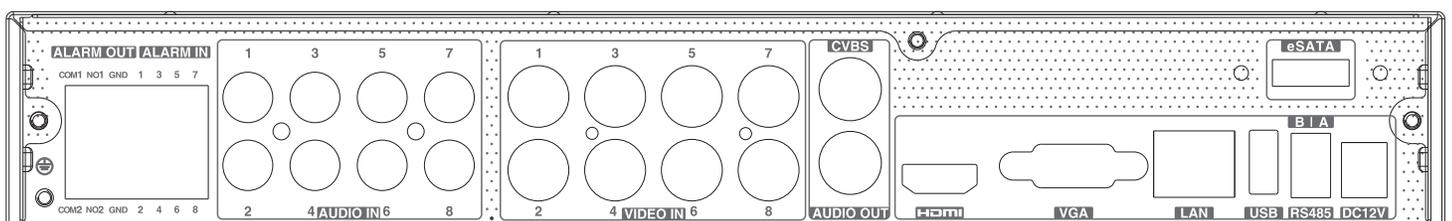

## Specification

| Model        |                     | TD-2704TS-HC  | TD-2708TS-HC                |
|--------------|---------------------|---|-----------------------------|
| System       | OS                  | Embedded Linux  |                             |
| Video        | Analog Video Input  | BNC × 4   | BNC × 8                     |
|              |                     | BNC interface (1.0Vp-p; 75Ω)  |                             |
|              |                     | TVI/AHD/CVI : 5MP/4MP/1080P/720P/WD1 (live)   |                             |
|              | IP Video Input      | 2CH (up to 6CH)   | 4CH (up to 12CH)            |
|              |                     | Up to 5MP@25fps/4MP@30fps   | Up to 5MP@30fps             |
|              | Total Input         | 6CH   | 12CH                        |
|              | Output              | HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768<br>VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768<br>BNC × 1 : CVBS ( used as the main or spot output )                               |                             |
| Compression  | H.264/H.265         |   |                             |
| Audio        | Input               | RCA × 4   | RCA × 8                     |
|              | Output              | RCA × 1 (linear, 600Ω)  |                             |
|              | Two-way audio       | Take up channel one audio input   |                             |
|              | Compression         | G.711(U/A)  |                             |
| Record       | Resolution          | 5MP Lite/4MP Lite / 1080P/1080P Lite/720P/WD1/D1  |                             |
|              | Frame Rate          | Analog Channel:<br>5MP Lite@10fps (PAL / NTSC)<br>4MP Lite/1080P@12fps(PAL) / 15fps (NTSC)<br>1080P Lite/720P/WD1/D1@25fps (PAL) / 30fps (NTSC)<br>IP Channel: 25fps (PAL) / 30fps (NTSC) |                             |
|              | Bit Rate            | 32Kbps ~ 4Mbps  |                             |
|              | Mode                | Manual, timer, motion, smart event  |                             |
| Playback     | Playback            | 4CH   | 8CH                         |
|              | Search              | Time slice / time / event / tag search  |                             |
|              | Smart Search        | Highlight colors to display the camera record in a certain period of time, different colors refer to different record events  |                             |
|              | Function            | Play, pause, FF, FB, digital zoom, etc.   |                             |
| Alarm        | Mode                | Manual, motion, exception, smart event  |                             |
|              | Input               | 4CH   | 8CH                         |
|              | Output              | 1CH   | 2CH                         |
| Network      | Interface           | RJ 45 100Mbps × 1   |                             |
|              | Protocol            | TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP  |                             |
|              | Incoming Bandwidth  | 16Mbps (Max. 36Mbps)  | 32Mbps (Max. 60Mbps)        |
|              | Outgoing Bandwidth  | 40Mbps  | 60Mbps                      |
| MobileDevice | OS                  | iOS, Andriod  |                             |
| Storage      | HDD                 | SATA×1, up to 8TB   | SATA×1, up to 8TB; E-SATA×1 |
| Backup       | Local Backup        | U disk, USB mobile HDD  |                             |
|              | Network Backup      | Yes   |                             |
| Port         | RS 485              | Yes (half-duplex), connect to PTZ or keyboard   |                             |
|              | USB                 | USB 2.0 × 2   |                             |
|              | Remote Controller   | Optional  |                             |
| Others       | Power Supply        | DC12V/2A  | DC12V/3A                    |
|              | Consumption         | ≤ 10W ( without HDD )   | ≤ 10W ( without HDD )       |
|              | Dimensions(mm)      | 300 × 249 × 45mm ( W × D × H )  |                             |
|              | Working Environment | -10~50°C, 10%~90% (humidity)  |                             |