


CAMERA

TD-9525S3

2MP IR Water-Proof Turret Network Camera



- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080; ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, digital WDR, HLC, BLC and ROI coding
- 1CH built-in MIC
- Hardware reset
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- IP67 ingress protection;
- Support dual streams
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics: video blur detection, line crossing detection and region intrusion detection

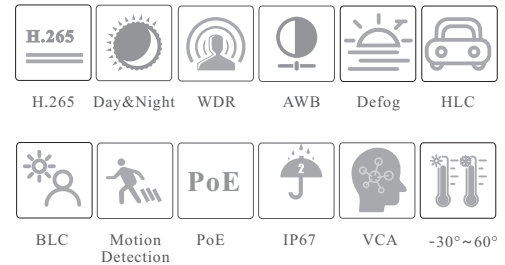

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS

| Specifications | Model | TD-9525S3 |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| Camera | | |
| Image Sensor | 1 / 2.9 "CMOS | |
| Image Size | 1920 × 1080 | |
| Electronic Shutter | 1 / 25 s ~ 1 / 100000 s | |
| Iris Type | Fixed Iris | |
| Min. Illumination | 0.0035 lux@F1.2,AGC ON; 0 lux with IR 0.013 lux@F1.4,AGC ON; 0 lux with IR | |
| Lens | 2.8~12mm@F1.4, (manual varifocal lens), horizontal field of view: 88°~34.8° | |
| Lens Mount | Φ14 | |
| Wide Dynamic Range | Digital WDR | |
| BLC | Yes | |
| HLC | Yes | |
| Defog | Yes | |
| Digital NR | 3D DNR | |
| Angle Adjustment | Pan: 0°~360°; Tilt:0°~80°; Rotation: 0°~360° | |
| Image | | |
| Video Compression | Main stream: H.265 / H.264; Sub stream: H.265 / H.264 / MJPEG | |
| H.265 Compression Standard | Main Profile@ Leve4.1 High Tier | |
| Resolution | 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240 | |
| Main Stream | 60Hz : 1080P / 720P (1 ~ 30fps); 50Hz : 1080P / 720P (1 ~ 25fps) | |
| Sub Stream | 60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps) | |
| Bit Rate | 64 Kbps ~ 6 Mbps | |
| Bit Rate Type | VBR / CBR | |
| Audio Compression | G711A / U | |
| Image Settings | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser | |
| ROI | Each ROI to be configured separately | |
| Interfaces | | |
| Network | RJ 45 | |
| Video Output | No | |
| Audio | Built-in MIC × 1 | |
| Storage | Built-in micro SD card slot; up to 128GB | |
| Hardware Reset | Yes | |
| Functions | | |
| Remote Monitoring | Web browsing, CMS remote control | |
| Online Connection | Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission | |
| Network Protocol | UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, HTTP, FTP 802.1x, UPnP, HTTPs, QoS | |
| Interface Protocol | ONVIF | |
| Storage | Network remote storage; micro SD card storage | |
| Smart Alarm | Motion detection, SD card error, SD card full | |
| Intelligent Analytics | Video blur detection, line crossing detection and region intrusion detection | |
| General Function | Watermark, IP address filtering, video mask, heartbeat, illegal login lock | |
| PoE | Yes, IEEE802.3 af | |
| IR Distance | 30 ~ 50m | |
| Ingress Protection | IP 67 | |

| Others | |
|--------------------------|----------------------------------------------------------------------------------------------|
| Power Supply | DC 12V/PoE |
| Power Consumption | < 8W |
| Operating Environment | - 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing) |
| Dimensions (mm) | Φ 111.5 × 99.6 |
| Weight (net) | Approx. 0.64KG |
| Installation | Ceiling mounting (wall mounting available with the junction box and bracket) |
| Certificate | CE, FCC |
| Environmental Protection | Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006) |

DIMENSIONS

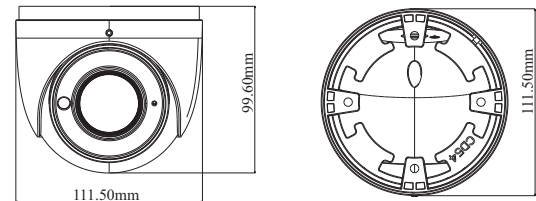

AVAILABLE ACCESSORIES



AVAILABLE MODEL

| | | |
|-----------------|------------------------|-----------------------|
| Available Model | TD-9525S3(D/FZ/PE/AR3) | Manual varifocal lens |
|-----------------|------------------------|-----------------------|