


CAMERA

TD-9527E3B

2MP IR Starlight Dome Network Camera



- 2MP (1920 × 1080) @30fps
- H.265+/H.265/H.264+/H.264/MJPEG coding
- ICR auto switch, true day / night vision
- 10 ~ 20m IR night view distance
- Starlight
- 3D DNR, true WDR, HLC, BLC, Defog, Smart IR and ROI coding
- Support corridor mode
- 1CH audio input and 1CH built-in MIC
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP 66 ingress protection
- Support three streams
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics

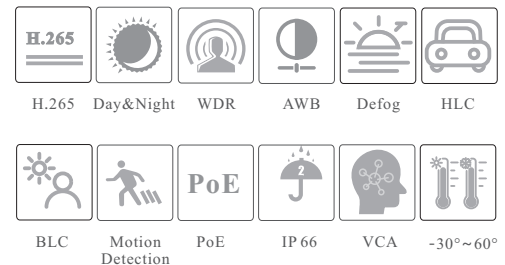

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS


Specifications	Model	TD-9527E3B		
Camera				
Image Sensor	1 / 2.8" CMOS			
Image Size	1920 × 1080			
Electronic Shutter	1 / 2 s ~ 1 / 100000 s			
Iris Type	Fixed Iris			
Min. Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR			
Lens	2.8mm@F1.6, horizontal FoV: 101.5°; vertical FoV: 54.6°; diagonal FoV:117° 3.6mm@F1.6, horizontal FoV: 78.9°; vertical FoV: 45.5°; diagonal FoV:101°			
Focus	Fixed			
Lens Mount	M12			
Day & Night	ICR			
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	Yes			
Digital NR	3D DNR			
Angle Adjustment	Pan: 0°~360°; Tilt:0°~70°; Rotation: 0°~350°			
Image				
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile			
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240			
Main Stream	60Hz:1080P/720P(1~30fps); 50Hz:1080P / 720P(1~25fps)			
Sub Stream	60Hz:720P/D1/CIF (1~30fps); 50Hz:720P/D1/CIF (1~25fps)			
Third Stream	60Hz:D1/CIF /480×240 (1~30fps); 50Hz:D1/CIF/480×240 (1~25fps)			
Bit Rate	64 Kbps ~ 6 Mbps			
Bit Rate Type	VBR / CBR			
Audio Compression	G711A / U			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, Image Flip, Image Mirror, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
Interfaces				
Network	RJ 45			
Video Output	No			
Audio	1CH audio input; Built-in MIC × 1			
Storage	Built-in micro SD card slot; up to 256GB			
Reset	Yes			
Alarm	No			
Intelligent Analytics (Smart Events)				
Perimeter Protection	Line crossing, region intrusion/entrance/exiting (human/motor vehicle/ non-motor vehicle classification)			
Statistics	Target counting by line/area, heat map			
Exception Detection	Scene change, video blur and video cast detection			
Face Detection	Face detection and face capture			
Other Events	Abandoned/missing object detection, crowd density detection			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8mm	41.49m(136.12ft)	16.60m(54.46ft)	8.30m(27.23ft)	4.15m(13.61ft)
3.6mm	50.89m(166.96ft)	20.35m(66.76ft)	10.18m(33.39ft)	5.09m(16.69ft)
Functions				
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP			
Web Browser	IE(plugin-in required)/Google Chrome/Edge/Firefox/Safari			
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission			
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPS, QoS			

Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SD card error, SD card full
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE	Yes , IEEE802.3af
IR Distance	10 ~ 20 m
Ingress Protection	IP 66
Others	
Power Supply	DC12V/PoE
Power Consumption	< 6W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 110 × 59.8
Weight (net)	Approx. 0.38KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

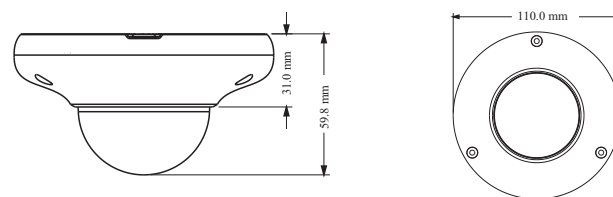

AVAILABLE ACCESSORIES

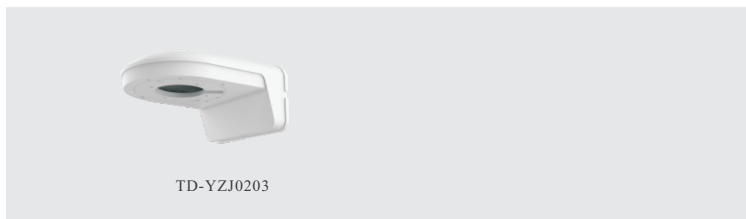

AVAILABLE MODEL

Available Model	TD-9527E3B(D/PE/AR1)
-----------------	----------------------